


# InduraPower Series 108

## Product Details

Ideal pack series for motorcycles and power sports use. Equivalent up to 350 CCA. 8 AH capacity with Smart Technology

- Reserved power for a last start of the vehicle
- Ability to monitor the battery's health
- Built-in heater for starting -22 degrees °C
- On/off switch battery for storage mode
- Environmentally friendly (Li based)
- Compact size and low weight
- iOS and Android app for battery mgmt
- Built-in short circuit protection
- 5-year replacement warranty

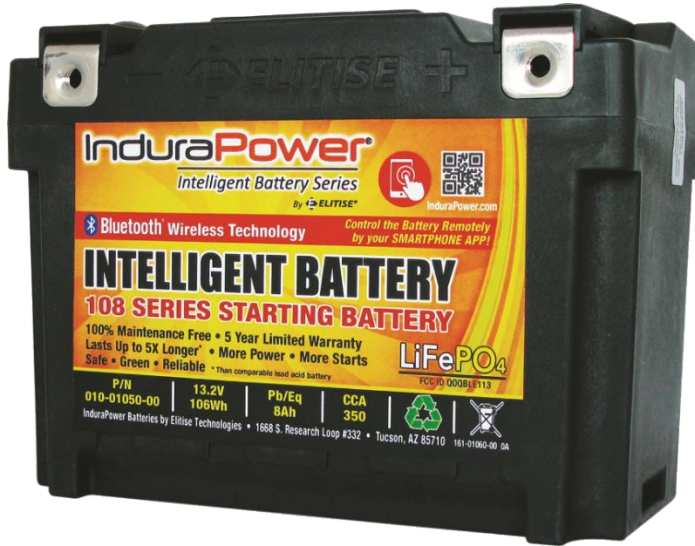

**MSRP: \$450**

BATTERY SPECIFICATIONS AND DATA	
Nominal Voltage	13.33V
Capacity (1 Hour Discharge Rate)	8 (1C rate)
Cold Crank Amps (CCA)	350 (Equivalent, 15 sec. @ 75 degF, Voltage > 9.6V)
Max Continuous Discharge Current (A)	80
Under-voltage protection	10.2
Max Pulse Discharge Current (30 seconds) (A)	200
Standard Charge Voltage	13.4-14.6
Maximum Charge Voltage	14.8
Maximum Charge Current (A)	80A (from vehicle charging system)
Life (Charge Cycles)	>2000 cycles @ 1C discharge rate, 25 degC (80% depth of discharge)
Life Years	>6
Self Discharge Rate (Monthly)	2-3%
Weight (lbs)	5.0
Dimensions (W x L x H) (inches)	3.38 x 6.28 x 4.78
Environmental Rating (resistance to water intrusion)	IP67 (no ingress of dust, protected against water immersion to 1m in depth)
Operating Temperature	-30 degC to 85 degC
Charging Temperature	-5 degC to 65 degC
Storage Temperature (6 Month)	-20 degC to 35 degC